

MEGAFORCE

The Stage Company

TVG-II





The TVG II stage system is a proven MEGAFORCE success story. A classic tower stage with a total area of approx. 26 x 12 meters that can support up to 19 tons. This versatile system provides a performance area of approximately 16 x 12 meters with an overhead clearance of 9.30 meters. This stage comes along with LED wings, hanging pick-points for PA-systems, covered backstorage, a loading dock, ramps and a 6 x 4 meter FoH structure with two floors. Additional options can include camera tracks, separate PA - or spotlight-towers, additional platforms and more. All structures guarantee a high flexibility and custom-tailored ability to meet the needs of virtually every organizer and event. The TVG II is particularly suited for festivals and shows that target audience capacities of approximately 10,000 visitors.

MEGAFORCE

The Stage Company

Stage: TVG II 17x12-5W-RL-0BS

Stage built on a Layher AR base with 8 towers.

Roof and side skin made from black PVC.

Stage floor built with resin coated and shatterproof plywood decks.

Performance area:	16,72 m x 11,40 m
Wings:	4,50 m x 11,40 m
Total height of stage:	13,00 m
Total area of stage:	26,50 m x 12,00 m (+ ramps and loading dock)
Height of podium:	2,00 m / 2,30m
Clearance with stage floor @2,30m:	9,30 m

Rigging capacity

Roof:	8,9to (with spread load up to 13to)
Per wing:	3,0to
Per outrigger:	2,2to

Also included:

2 stage ramps, 2 stage staircases,
construction light, loading dock



Operational costs:

Transport volume: 3 trailers
Build-up days: 2
Dismantling days: 1
Construction machines: forklifts, crane

Build-up day 1

	Quantity	Notice
Headcrew	3	
Scaffolder	4	equipped with tool kit and helmet, must have 16m climbing licence, according to the Professional Association's Institute for Industrial Safety
Steelhands	4	equipped with tool kit and helmet, must have a 2,5m climbing licence according to Professional Association's Institute for Industrial Safety
Forklift incl. operators	2	Lifting capacity at least 4to Operating height at least 4m
Crane incl. operators	1	Lifting capacity at least 60to Operating height at least 16m

Build-up day 2

	Quantity	Notice
Headcrew	3	
Scaffolder	4	equipped with tool kit and helmet, must have 16m climbing licence, according to the Professional Association's Institute for Industrial Safety
Steelhands	4	equipped with tool kit and helmet, must have a 2,5m climbing licence according to Professional Association's Institute for Industrial Safety
Forklift incl. operators	2	Lifting capacity at least 4to Operating height at least 4m



MEGAFORCE

The Stage Company

Dismantling day 1



	Quantity	Notice
Headcrew	3	
Scaffolder	4	equipped with tool kit and helmet, must have 16m climbing licence, according to the Professional Association's Institute for Industrial Safety
Steelhands	4	equipped with tool kit and helmet, must have a 2,5m climbing licence according to Professional Association's Institute for Industrial Safety
Forklift incl. operators	2	Lifting capacity at least 4to Operating height at least 4m
Crane incl. operators	1	Lifting capacity at least 60to Operating height at least 16m



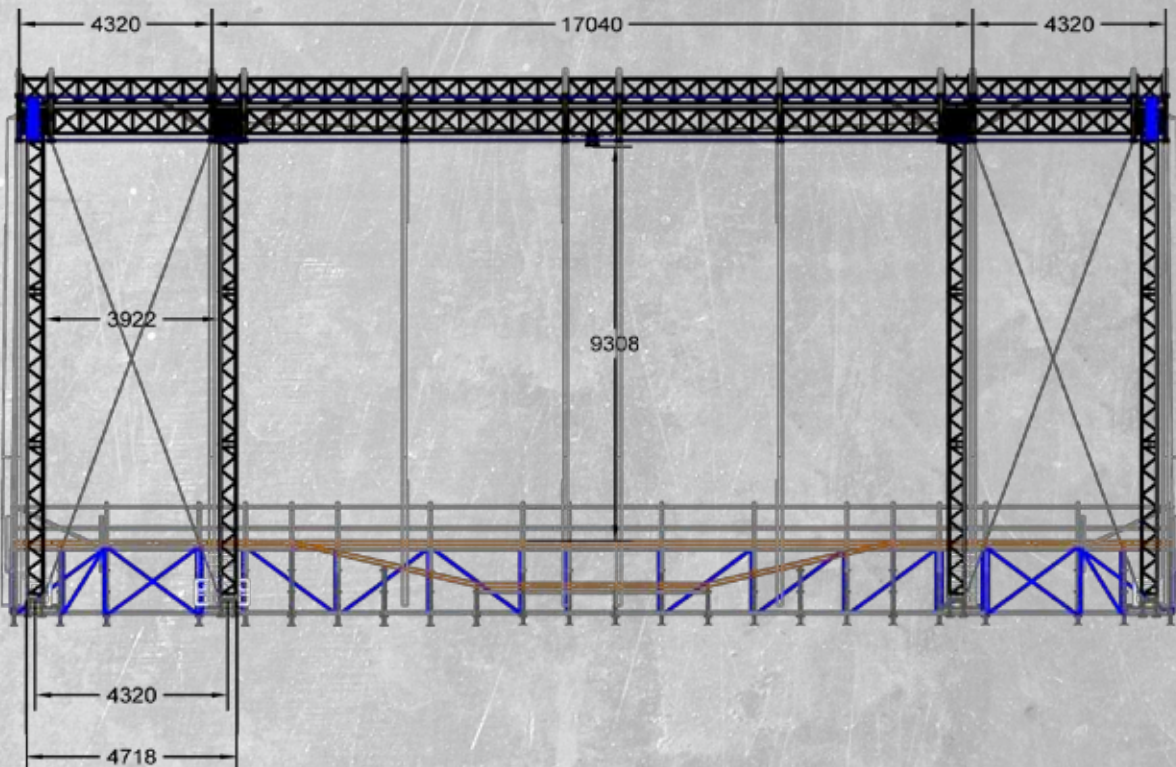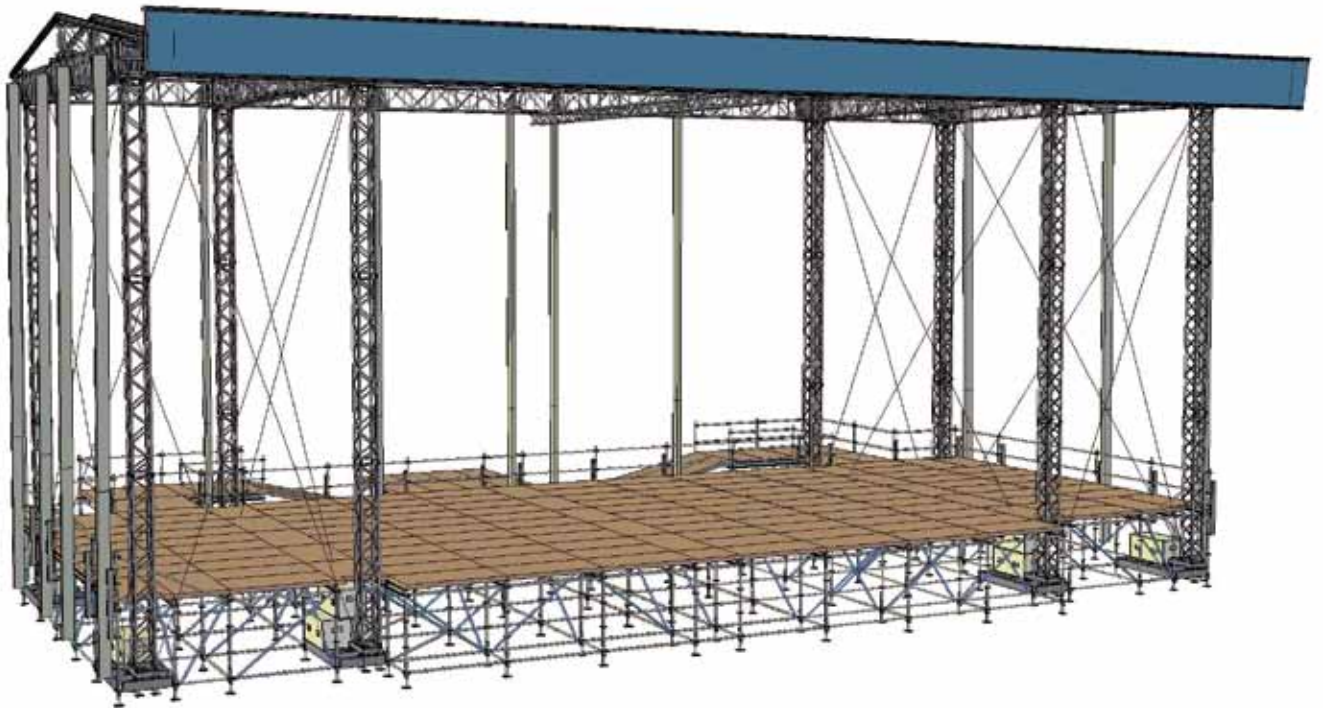

MEGAFORCE

The Stage Company

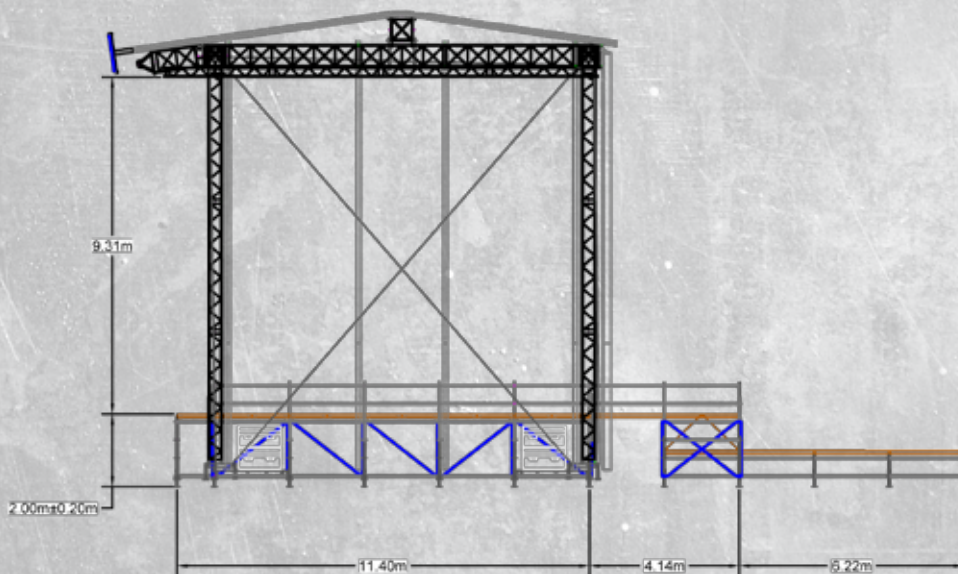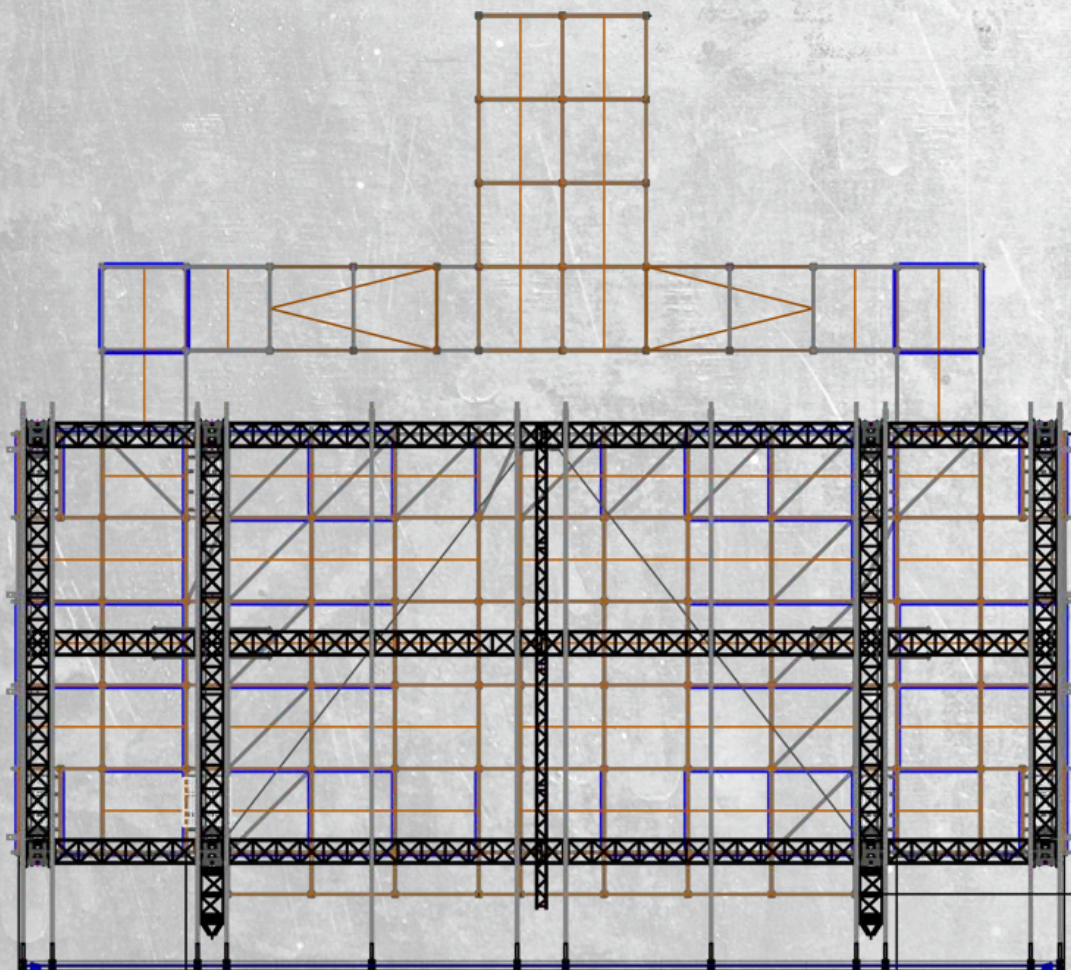



Interested? Give us a call!

MEGAFORCE

The Stage Company

MEGAFORCE Bühnen- und Veranstaltungstechnik

Jöhlinger Straße 118

D – 76356 Weingarten

Tel.: 0049 - 7244 - 72 02 0

Fax: 0049 - 7244 - 72 02 22

info@megaforce.de

[WWW.MEGAFORCE.DE]

